

KONSTRUKT HES GROUT
High Early Strength Class C Cementitious Grout

Product Code:
GROUTHES20

Issue Date: 21/08/2015

DESCRIPTION

Konstrukt HES Grout is a Class C high quality, free flowing non shrink, high early strength development and high ultimate strength gain cementitious grout.

Konstrukt HES complies with US Corp of Engineers Spec CRDC 621-82A and ATSM C1107-91 for Class C grout.

RECOMMENDED USES

- Cementitious grouting where high early strength is required
- Heavy duty support grout beneath high load machine base plates
- Precision grouting application
- Anchoring bolt holes
- Bridge bearing pads
- Crane rail plates
- Pre-cast concrete sections
- Cavities, gaps and recesses
- Rapid reinstate of equipment, minimizes downtime
- Grouting requiring dynamic load bearing and applications subject to continuous vibration

FEATURES AND BENEFITS

- High early strength even at low temperatures
- Dual expansion compensates for shrinkage
- in the plastic and hardened state
- High ultimate (28 day) strength
- Exceptional flow characteristics
- Rapid strength gain and set times
- Variable consistency obtainable
- Equipment and machinery can be reinstated after 2 hours
- Non-metallic eliminates staining
- Good impact and thermal resistance
- Complies with US Corp of Engineers A CRDC-621-82A and ASTM C1107-91 for expansion
- Pre bagged material overcomes potential on site batching variation
- Grouting from 10mm – 150mm in a single application
- Australian made

APPLICATION INSTRUCTIONS

Surface and Substrate Preparation

The substrate to be grouted must be clean, sound and free from dust, oil, grease, curing compounds or any foreign matter that will affect the grout adhesion bond. Bolt holes and anchor points must be clean and free of water.

Pre-Soaking

All prepared areas must be saturated with water for a minimum of 4 hours prior to grouting. This will reduce the porosity of the substrate. Prior to grouting, ensure all excess water is removed and all holes must be free from water and no puddles of water are present. If grouting under base plates, it is imperative that bleed holes or venting holes are provided (this will eliminate pressure build up in a confined area).

Formwork

It is essential that the formwork to be constructed is leak proof and water tight. In order to achieve this it is recommended that foam rubber strips or a suitable sealant such as polyurethane or silicone be used

underneath the formwork.

The formwork should be constructed, which will allow and ensure a grout head is maintained on the side above the level of the underside at the base plate.

The formwork should allow for gravity flow of grout with a suitable grout head allowing for continuous flow between the base plate and the concrete substrate.

To ensure ease of formwork removal, the formwork should be coated with form oil or release oil prior to grouting (consult Konstrukt Technical Department for additional information).

Large Volume Grouting

For grouting requiring thicknesses greater than 150mm, special procedures are necessary, such as the addition of Epilox Fillers.

Epilox Fillers are recommended to be added at a rate of 10-15kg per 20kg bag of Konstrukt HES Grout.

DO NOT ADD EXCESS AGGREGATE AS THIS WILL AFFECT THE WATER REQUIREMENT AND ULTIMATE STRENGTH GAIN.

Temperature

Low Temperature Application:

At low temperatures below 10°C, the grout setting time is extended and some bleeding may occur. The early strength gain will be dramatically reduced. However, ultimate strength will be maintained. It is recommended that the Konstrukt HES Grout and the water be conditioned to 20-25°C overnight or several hours before application. This will assist in strength development.

High Temperature Application:

At high temperatures greater than 30°C, the grout setting time is reduced and grouting application becomes problematic due to very early setting times and reduced placement times.

It is recommended that Konstrukt HES Grout be kept in a cool environment and the use of cold water be used for mixing. It is recommended that in instances where the temperature is greater than 30°C, the grouting be conducted early in the day or late in the evening and sheltered from sunlight and direct heat.

Mixing

Konstrukt HES Grout is ready to use, simply requiring the addition of water.

Konstrukt HES Grout must be mixed with a mechanical mixer with a high shear mixer or a suitable drum mixer that creates a forced action mixing.

For smaller quantity mixing, an electric drill with a spiral mixing paddle is suitable. The speed drill should be approx. 500-600 rpm.

DO NOT MIX BY HAND.

Plastic/ Trowellable Grout:	Add 2.5 - 2.8 litres	per 20kg bag
Flowable/ Pourable Grout:	Add 3.2 - 3.5 litres	per 20kg bag

KONSTRUKT HES GROUT
High Early Strength Class C Cementitious Grout

Product Code:
GROUTHES20

Issue Date: 21/08/2015

Always add the grout powder to the pre-measured water. DO NOT ADD ADDITIONAL WATER AS GROUT WILL SEGREGATE AND BLEED AFFECTING PERFORMANCE.

The selected water level should be accurately measured and added to a suitable mixing container.

Add the powder (grout) to the water and mix for 3-5 minutes until a homogeneous consistent mix is obtained.

DO NOT ADD ADDITIONAL WATER OTHER THAN SPECIFIED ABOVE. DISCARD ANY GROUT THAT HAS STIFFENED OR IS UNWORKABLE.

Placement

Konstrukt HES Grout can be placed in two different ways:

1. Gravity flow using header box-


Mix the grout to a flowable consistency and pour grout from one side to avoid air entrapment. Ensure a grout head box is used and the grout head is maintained at all times. This will ensure continuous flow of grout without the possibility of air entrapment.

2. Large volume pumping-

Mix the grout using a forced action mixer. A positive displacement pump is the recommended pump for large placement application. For large grout pours ensure the grout is pumped from the bottom upwards as this will minimize any air entrapment and ensure complete void filling. For base plates pump from one side ensuring an air bleeder hole is available in the formwork or base plate to ensure any build-up of pressure is released from the bleeder hole.

DO NOT VIBRATE OR USE MECHANICAL VIBRATOR TO ASSIST FLOW.

For special grout application and placement contact a Synergy Member for further details.

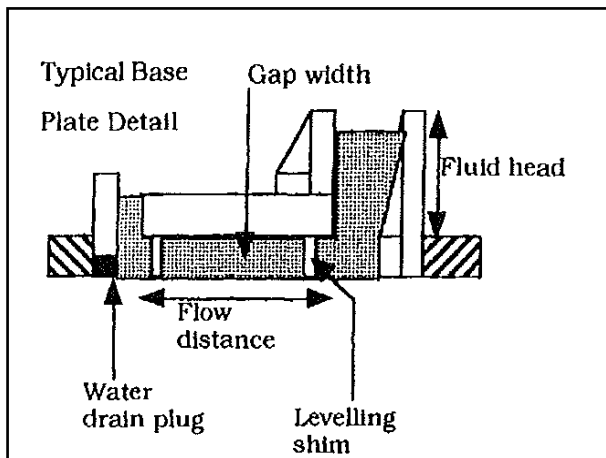

DRAWING I.1

Curing

On completion of grout application, all exposed grout should be cured in accordance to 'good practices' in concrete curing. The exposed grout should be covered with plastic sheeting, wet hessian or wet liquid curing compounds such as the Curecon range at Aftek Curing Compounds.

Curing plays a vital role in ultimate grout performance and strength development.

TYPICAL PROPERTIES	
Appearance	Light grey powder (grey when mixed)
Application Temp	Minimum 5° C Maximum 30° C
Expansion characteristics	Expansion 1-2% in plastic state
Time for Expansion	Start 5 min Finish 25 min
Bleed	0%

SETTING TIMES		
Water Requirement (litres per bag)	Trowellable 2.5 – 2.8	Flowable 3.2 – 3.5
Initial Set (hours)	20	25
Final Set (hours)	35	40
Tested at 20°C 50% RH Tested to AS 1012.18 for setting times		

AGE	Compressive Strength MPa		Flexural Strength MPa	
	Trowellable	Flowable	Trowellable	Flowable
2 hrs	>35	>25		
4 hrs	>45	>30		
8 hrs	>50	>36		
24 hrs	>60	>44	>5.3	>3.6
3 days	>65	>48		
7 days	>75	>50	>8.82	>7.0
28 days	>85	>65	>9.8	>9.5
Tested AS 1012.9 and AS2350-11 at 20°C for compressive strength. Tested to ASTM C348-86 at 20°C for flexural strength				

BOND STRENGTH		
Age (Days)	Trowellable MPa	Flowable MPa
Initial Set (hours)	20	25
28	>9.5	>10
Tested to ASTM C882-1987, Slant shear method.		

KONSTRUKT HES GROUT
High Early Strength Class C Cementitious Grout

Product Code:
GROUTHES20

Issue Date: 21/08/2015

YIELDS

Consistency	Trowellable	Flowable
litres of water per 20kg bag	2.5 – 2.8	3.2 – 3.5
Yield per bag litres	10.2 Approx.	11 Approx.
Fresh wet density kg/m ³	2220	2200
Bags required per cubic metre (m ³)	98	91

SPECIFICATION CLAUSES

Performance specification

All grouting shown on the drawing 1.1 must be carried out with a pre-packaged cement based grout which is chloride free.

It shall be mixed with clean water to the required consistency. The plastic grout must not bleed or segregate.

A positive volumetric expansion shall occur while the grout is plastic by means of a gaseous system.
The compressive strength of the grout must exceed 50 MPa at 7 days and 65 MPa at 28 days.
The storage and placement of the grout must be in strict accordance with the manufacturer's instructions.

Supplier's specification

All grouting where shown on the drawing must be carried out using as manufactured by Aftek and used in accordance with the manufacturer's data sheet.

PACKAGING

Konstrukt HES grout is supplied in 20kg poly lined bags. Item No.

STORAGE-SHELF LIFE

Konstrukt HES has shelf life of 9 months if stored in the original sealed packaging in dry, low humid environments.

PRECAUTIONS

- Unrestrained area must be kept to a minimum
- Do not add additional water other than what is specified
- Never apply mixed grout to a dry porous substance
- Refer to MSDS (material safety data sheet) prior to mixing
- Always apply grout in a continuous operation ensure grout head is maintained
- At low temperatures, grout setting time and strength gain will be extended
- At very high temperatures, grout will set and cure faster potentially causing cracking and delamination.

For more detailed information, please read the MSDS for this product.

CLEAN UP

Wash all tools and equipment with fresh, clean water immediately after use. Penaflo Panel Grout can only be removed mechanically.

HEALTH AND SAFETY

Avoid contact with skin. Protective gloves and clothing are recommended when mixing or using this product. Please refer to full MSDS (material safety data sheet) for this product, which is available from Synergy upon request or through www.synergysystems.com.au

TECHNICAL SUPPORT

Aftek manufactures a comprehensive range of high quality and performance construction products. In addition, Synergy Members offers technical support and on-site advice to specifiers, end users and contractors.

Please contact your Local Synergy Member for this service.

The information and any recommendations relating to the application and end-use of all Konstrukt products are provided in good faith based on Synergy knowledge and experience of the products. In applications, the differences in materials, and variances of substrates and actual site conditions can vary such that no warranty in respect of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be taken as inferred either from this information, or from any written recommendations, or from any other advice offered by Synergy. The proprietary rights of third parties must be observed. All orders are accepted subject to our sale terms and conditions. All users should always refer to the most recent and up to date issue of the Technical Data Sheet for the product concerned, which is available on request. It is recommended that products should always be properly stored, handled and applied under tested and recommended conditions.

PLEASE CONSULT OUR TECHNICAL DEPARTMENT FOR FURTHER INFORMATION.